KOHLER®

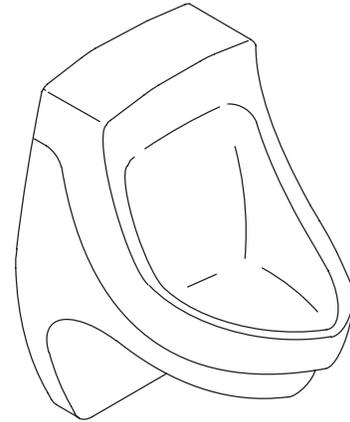## FEATURES

- *Vitreous china*
- *Siphon jet*
- *3/4" rear spud*
- *14-1/2" (36.8cm) extended rim*
- *Includes inlet & outlet spuds and hangers*
- *Includes anti-backsplash wall*
- *1.0 gallon (3.78L) or less flush*
- *ADA compliant when rim is mounted no higher than 17" (43.2cm) from finished floor*

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- *ADA when rim is mounted no higher than 17" (43.2cm) from finished floor*
- *ASME/ANSI A112.19.2M*
- *ASME/ANSI A112.19.6M*
- *CABO/ANSI A117.1*
- *IAPMO/UPC*
- *Energy Policy Act of 1992 (EPACT)*
- *Canadian Standards Association (CSA)*
- *States of Massachusetts, New York, & Texas*
- *City of Los Angeles, CA*

COLORS/FINISHES

- 0   White
- Other   Refer to Fixtures Price Book for additional colors
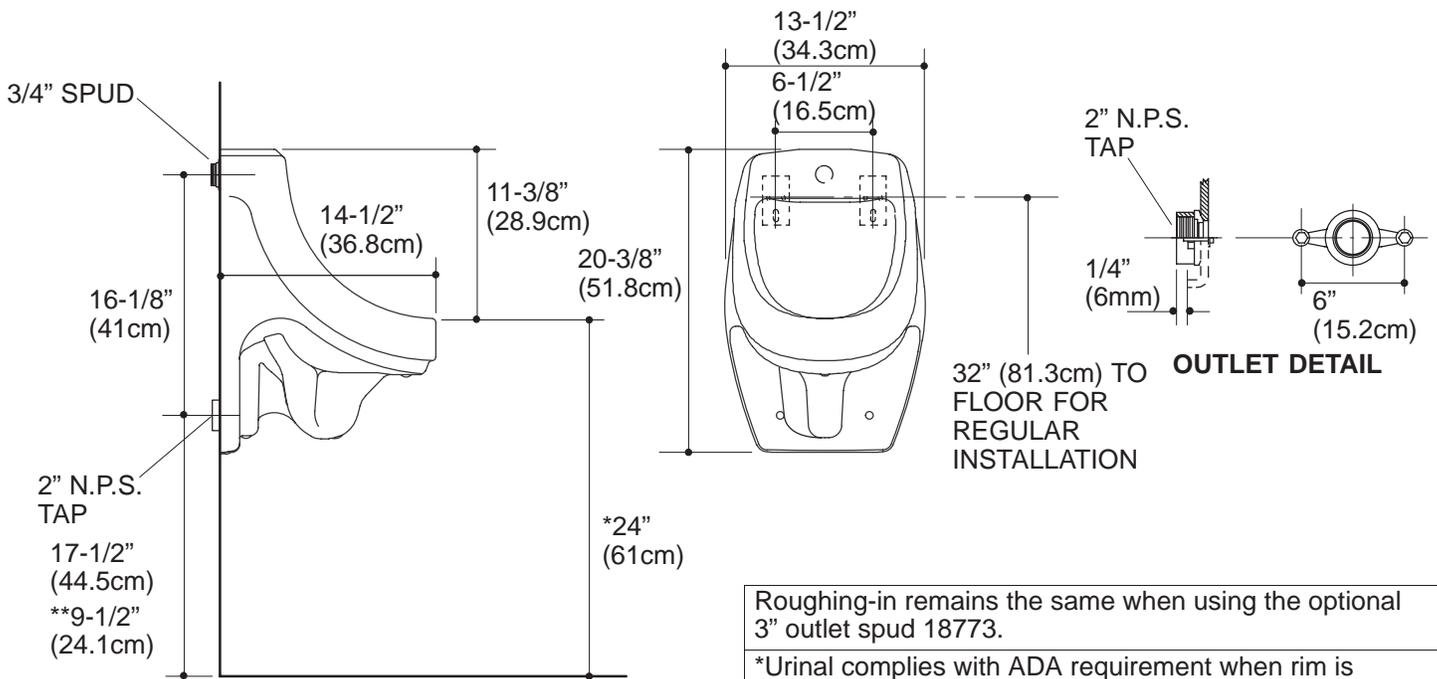
SPECIFIED MODEL:

Model	Description	Colors/Finishes	
K-5016-ER	3/4" rear spud urinal	☐0 White	☐Other_____

PRODUCT SPECIFICATION:

The siphon jet urinal shall be made of vitreous china with a 3/4" rear spud. Urinal shall have 14-1/2" (36.8cm) extended rim. Urinal shall include inlet & outlet spuds and hangers. Urinal shall include anti-backsplash wall. Urinal shall be 1.0 gallon (3.78L) or less flush. Urinal shall be ADA compliant when rim is mounted no higher than 17" (43.2cm) from finished floor. Urinal shall be Kohler Model K-5016-ER-_____.

We reserve the right to make revisions without notice in the design of fixtures or in packaging unless this right has specifically been waived at the time the order is accepted.

Page 1 of 2
116344-4-**AC**

PRODUCT INFORMATION

ADA compliant.	
Fixture:	
Configuration	Rear spud
Spud inlet size	3/4"
Gallons per flush	< 1 gallon* (3.78L)
*Designed to flush with less than one gallon (3.78L) of water when installed with a water saving flush valve.	
Included Components:	
3/4" inlet spud	18376
2" outlet spud	18766
Hanger (2 required)	64512
Flush valve requirements: Refer to manufacturer's instructions and local codes.	

3/4" SPUD

13-1/2" (34.3cm)

6-1/2" (16.5cm)

2" N.P.S. TAP

11-3/8" (28.9cm)

14-1/2" (36.8cm)

20-3/8" (51.8cm)

1/4" (6mm)

6" (15.2cm)

16-1/8" (41cm)

OUTLET DETAIL

32" (81.3cm) TO FLOOR FOR REGULAR INSTALLATION

2" N.P.S. TAP

17-1/2" (44.5cm)

**9-1/2" (24.1cm)

*24" (61cm)

Roughing-in remains the same when using the optional 3" outlet spud 18773.

*Urinal complies with ADA requirement when rim is mounted no higher than 17" (43.2cm) from finished floor.

**Outlet height for ADA compliance.

1.25>116

PRODUCT DIAGRAM

THE BOLD LOOK
OF **KOHLER**®