

Features

- Durable swirl gloss finish.
- Modular design allows it to be moved around corners and through doorways with ease.
- Convenient shelving and acrylic towel bar on back wall.
- 15" (381 mm) bath depth (floor to top of threshold).
- 60" (1524 mm) x 30" (762 mm) x 72-3/4" (1848 mm) complete unit finished dimensions.

Material

• Compression molded from our exclusive solid Vikrell® material.

Installation

- Tongue-and-groove four-piece modular design allows for easy snap together installation.
- Caulk required in seams for proper installation.

Components

Product includes: 61041120 60" Bath 61044100 60" Bath/Shower Wall Set





All Pro

60" Bath/Shower



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold


STERLING Warranty - Fixtures Made of Solid Vikrell Material

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color Code Description



USA/Canada: 1-800-STERLING (1-800-783-7546) www.sterlingplumbing.com 2-18-2015 01:08





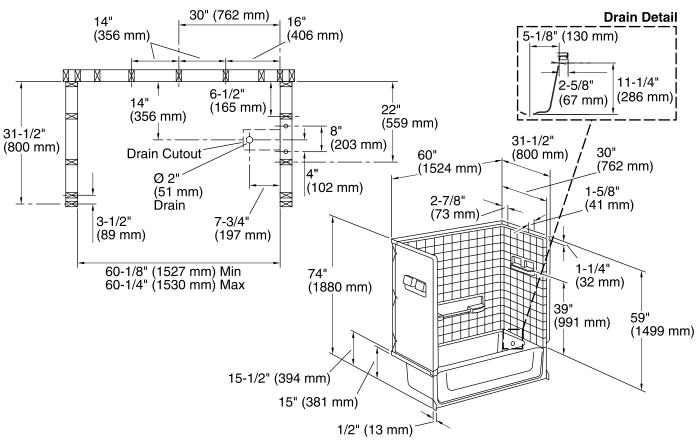

Technical Information

All product dimensions are nominal.	
Installation:	3-Wall Alcove
Drain location:	Right
Water depth:	9-3/8" (238 mm)
Water capacity:	44 gal (166.6 L)
Door height required:	57-3/4" (1467 mm)
Door width required:	57-1/2" (1461 mm)

Notes

Measure your actual product for roughing-in details.

Install this product according to the installation guide.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown.